

Order No.
CH 31701


Sulphur Dioxide 1/a

Standard Measuring Range : 1 to 25 ppm
Number of Strokes (n) : 10
Time for Measurement : app. 3 min
Standard Deviation : ± 10 to 15 %
Colour Change : greyblue \rightarrow white

Ambient Operating Conditions

Temperature : 15 to 25 °C
Absolute Humidity : 3 to 20 mg H₂O / L


Reaction Principle



Cross Sensitivity

Hydrogen sulphide in the TLV range is retained in the prelayer and does not interfere.

Nitrogen dioxide will shorten the reading.

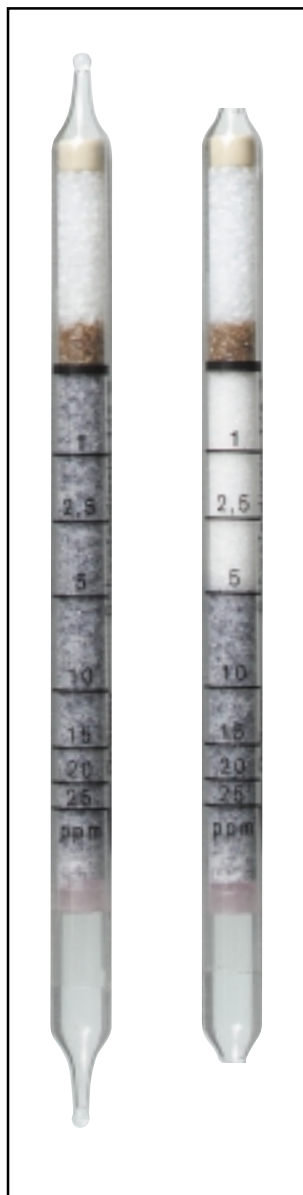

SI-192/0001